



Standards and Guidance Documents

Document Title	Pedestrian Facilities at Signal - Controlled Junctions Part 4
Reference	TAL 5/05

Date	2005
Publisher	Department for Transport (DfT)
Category	Guidance
Search terms	traffic signals; pedestrians; crossings

Information:

This document has been downloaded from the **ITSnow.org** website, which aims to encourage the promotion of best practice and continued professional development, by developing an improved understanding of current standards, advice and issues relating to Intelligent Transport Systems and Traffic Control.

The small print:

Conditions


Please read these conditions before you use this document. Although all efforts are made to host current versions of documents on the **ITSnow.org** web-site, we cannot offer an absolute guarantee that they have not been superseded. Information is provided 'as is' and excludes all representations, warranties, obligations and liabilities in relation to the information. We do not accept responsibility or liability for any errors or omissions in the information we supply and shall not be liable for any loss, injury or damage of any kind caused by its use. We do not guarantee the continued supply of information. Any information used is at your own risk.

Copyright

© **ITSnow.org copyright** - You may re-use this document (not including logos) free of charge in any format or medium. You must re-use it accurately and not in a misleading context. The material must be acknowledged as ITSnow.org copyright and you must give the title of the source document. Where we have identified any third-party copyright material you will need to obtain permission from the copyright holders concerned. This document may be the subject of third-party copyright, with one or more of the following:

- **OGL** Contains public sector information licensed under the Open Government License.
- Crown copyright material is reproduced under the terms of the Click-Use license; PSI licence number C2011000278.
- Parliamentary material is reproduced with permission of the Controller of HMSO on behalf of Parliament; Parliamentary license number P2011000120.
- Other material is reproduced with permission of the relevant author or publisher.

This document is also available on our website at www.itsnow.org

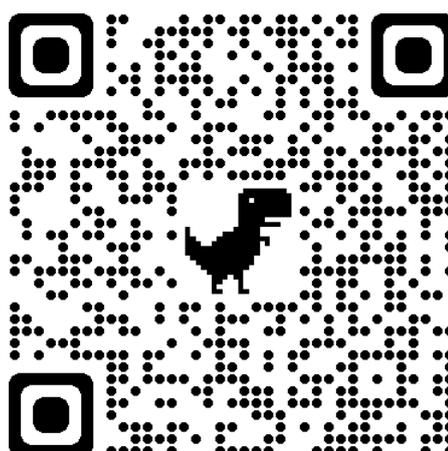

Any enquiries regarding this document should be sent to us at info@itsnow.org.



Pedestrian Facilities at Signal-Controlled Junctions

This Leaflet is in four parts. This part includes Tables 1 and 2 referred to in parts 1 & 3 and the reference section

TABLE 1

Advantages and disadvantages of alternative orientation at staggered crossings

Stagger	Advantages	Disadvantages
Left/right*	<ul style="list-style-type: none"> ■ Consistent with stand-alone crossings. ■ Encourages pedestrians to face oncoming vehicles. ■ Pedestrians on exit of junction are nearer to the junction, improving intervisibility. 	<ul style="list-style-type: none"> ■ Moves stop line and queue further from junction. ■ May increase intergreens and therefore lost time if crossing points, on all approaches, are not the same. ■ If a stop line were needed for the crossing on exit it would be very close to junction.
Right/left*	<ul style="list-style-type: none"> ■ Brings the stop line nearer to the junction. ■ Moves the exit crossing away from the "side road" and allows drivers of turning vehicles longer to assess possible dangers. ■ Allows possible stop line for exit crossing to be a reasonable distance from junction. 	<ul style="list-style-type: none"> ■ Not consistent with stand-alone crossings. ■ Pedestrians not encouraged to face oncoming vehicles whilst walking between crossings. ■ May cause problems with intervisibility between "side road" and pedestrians.

* See layout drawings in Part 2

TABLE 2

Period P	Farside Pedestrian Signal	Nearside Pedestrian Signal	Vehicle Signal	Farside Period (seconds)	Nearside Period (seconds)
1	Red Man	Red Man	Green	Dependant upon cycle time.	Dependant upon cycle time.
2	Red Man	Red Man	Amber	3	3
3	Red Man	Red Man	Red	Minimum to clear traffic in the junction.	Minimum to clear traffic in the junction.
4*	Green Man	Green Man	Red	6 - 12, depending upon carriageway width and pedestrian density.	4-9
5	Black-out (No Signal)	Red Man	Red	3-15**	1-5***
6	Red Man	Red Man	Red	1 - 3	0-30 (pedestrian extendable period)
7&8	Not applicable	Red Man	Red	-	See below
9	Red Man	Red Man	Red + Amber	2	2

* Values shown are for the standard fixed period. The green man can be further extended, see "Pedestrian Crossing Display Sequence" in Part 3, in which case the final extension period will be dependent on vehicular demands.

** Values shown are for the standard fixed period. The black-out can be extended in some cases, see TR 2210²⁴. The walking speed for a pedestrian is taken as 1.2 metres/second. The time (in seconds) of periods 5 and 6 together should be equal to the width of the carriageway in metres divided by 1.2.

*** see below "Nearside Pedestrian Signals"

NEARSIDE PEDESTRIAN SIGNALS

See sections on "Pedestrian Crossing Display Sequence" and "Nearside On-Crossing Detection" in Part 3

Since the introduction of Puffin stand-alone pedestrian crossings, the number of nearside pedestrian signals at signal-controlled junctions has been increasing. The below method of calculating timings has been tried at a number of junction installations and is recommended as advice.

P1 to P8 used in the following formula refer to the periods defined originally in LTN 2/95⁶, Tables 5 & 6. Note: In this method, Periods P7 and P8 have been incorporated in Period P6 and should both be set to 0 seconds.

See "Pedestrian Crossing Display Sequence" in Part 3 with reference to parallel facilities and UTC.

Some controllers may be configured to operate the pedestrian period in a consecutive mode, whilst others operate in a

concurrent mode. In the former, the variable extension (P6) starts at the end of the minimum extension period (P5) and in the latter, P6 starts at the same time as P5. Whichever mode is used, it is important to ensure that pedestrians always have sufficient time to cross the carriageway.

In the following formulae:

L is the width of the carriageway in metres;

1.2 is the pedestrian walking speed (85% of pedestrians) in metres/sec;

P_c represents the pedestrian "comfort factor". A suitable value for P_c should be carefully selected to reflect local characteristics of the pedestrians using the crossing (young, elderly, proximity to school, etc) and the width of the crossing. From experience so far, 3 seconds is a reasonable base setting which can be fine tuned on site if necessary. Time-of-day adjustments can be made during configuration to cater for special local needs and **P5** represents a fixed minimum

extension period which follows immediately after the invitation to cross period (P4). The base setting for this is 3 seconds. A minimum value of 2 seconds has been successfully trialled at a number of sites.

CONSECUTIVE MODE

The formula for calculating the nearside clearance period is as follows:

$$P6 = [(L/1.2 + Pc) - P5]$$

From the formula above, it should be observed that the pedestrian minimum and maximum timings would be as follows:

Pmin = P5 (because P6 only follows if the on-crossing detector registers)

Pmax = P5+P6 (this results in a time of $L/1.2 + Pc$)

CONCURRENT MODE

The formula for calculating the nearside clearance period is as follows:

$$P6 = (L/1.2 + Pc)$$

Pedestrian minimum and maximum timings will be as follows:

Pmin = P5 (because P6 only extends past P5 if the on-crossing detector registers)

Pmax = P6

REFERENCES

1	TD 50/04 The Geometric Layout of Signal-Controlled Junctions and Signalised Roundabouts, Design Manual for Roads and Bridges (DMRB), Vol. 6, Section 2. The Stationery Office (TSO).
2	Traffic Advisory Leaflet (TAL) 5/03, Walking Bibliography. Department for Transport (DfT).
3	TAL 4/98, Toucan Crossing Development. DfT.
4	TAL 3/03, Equestrian Crossings. DfT.
5	TA 84/01, The Code of Practice for Traffic Control and Information Systems, DMRB, Vol. 8, Section 1. TSO.
6	Local Transport Note (LTN) 2/95, The Design of Pedestrian Crossings. TSO.
7	TAL 1/01, Puffin Pedestrian Crossings. DfT.
8	TAL 1/02, The Installation of Puffin Crossings. DfT.
9	TAL 2/03, Signal-control at Junctions on High-speed Roads. DfT.
10	TA15/81, Pedestrian Facilities at Traffic Signal Installations, superseded. TSO.
11	TA16/81, General Principles of Control by Traffic Signals. TSO.
12	TR2206A Specification for Road Traffic Signals. Highways Agency (HA).
13	LTN 1/98, The Installation of Traffic Signals and Associated Equipment. TSO.
14	TAL5/91, Audible and Tactile Signals at Signal Controlled Junctions, superseded. DfT.
15	Chapter 5 of The Traffic Signs Manual, Road Markings 2003. TSO.
16	Traffic Signs Regulations and General Directions 2002. TSO.

REFERENCES, CONTINUED

17	Guidance on the Use of Tactile Paving Surfaces. DfT.
18	British Standard 7818:1995, Pedestrian Restraint Systems in Metal. BSI.
19	TA 57/87 Roadside Features, DMRB, Vol. 6, Section 3. TSO.
20	Inclusive Mobility. DfT.
21	TR0155B Audible Unit for use at Pelican Crossings. HA.
22	TAL 4/91, Audible and Tactile Signal at Pelican Crossing. DfT
23	TR 0157B, Tactile Equipment. HA.
24	TR2210 Traffic Signal Controller. HA
25	How to use a Puffin Crossing. DfT.

Traffic Advisory Leaflets (TALs) - Tel. 0207 944 2478. e-mail: tal@dft.gsi.gov.uk	BSI - Tel. 0208 996 9000. e-mail info@bsi-global.com
Highways Agency (HA) - Tel. 0117 373 8782 Also http://www.mcs206.org/homepage.htm	TSO - Tel. 0870 600 5522. Fax 0870 600 5533.
Inclusive Mobility and How to use a Puffin Crossing - Tel. 0870 1226 236, fax 0870 1226 237. e-mail: dft@twoten.press.net	Guidance on the Use of Tactile Paving Surfaces - Tel. 0207 387 2233

Details of Traffic Advisory Leaflets available on the DfT website can be accessed as follows: www.dft.gov.uk
From the DfT homepage, click on Roads and Vehicles, then Traffic and Parking Management and then Traffic Advisory Leaflets.

The Department for Transport sponsors a wide range of research into traffic management issues. The results published in Traffic Advisory Leaflets are applicable to England, Wales and Scotland. Attention is drawn to variations in statutory provisions or administrative practices between the countries. The Traffic Advisory Unit (TAU) is a multi-disciplinary group working within the Department for Transport. The TAU seeks to promote the most effective traffic management and parking techniques for the benefit, safety and convenience of all road users.

Department for Transport

Requests for unpriced TAU publications to:
Charging and Local Transport Division,
Zone 3/19, Great Minster House
76 Marsham Street, London, SW1P 4DR.
Telephone 020 7944 2478
e-mail: tal@dft.gsi.gov.uk

Scottish Executive

Within Scotland enquiries should be made to:
Scottish Executive, Development
Department, Transport Division 3, Zone 2-F,
Victoria Quay, Edinburgh, EH6 6QQ,
Telephone 0131 244 0847
e-mail: roadsafety2@scotland.gsi.gov.uk

Llywodrath Cynulliad Cymru Welsh Assembly Government

Within Wales, enquiries should be made to:
Welsh Assembly Government,
Transport Directorate, 2nd Floor, Cathays Park,
Cardiff, CF10 3NQ
Telephone 02920 826444
e-mail: keith.alexander@wales.gsi.gov.uk



Cycling



Traffic
Management



Walking



Bus Priority
Systems



Parking



Signs and
Signals



Intelligent
Transport Systems